



BEAMZ
MADE
EAZY


150.579 V1.0

BBP62

QUICK START GUIDE

CONTROL MENU

If the display is in standby, unlock it:

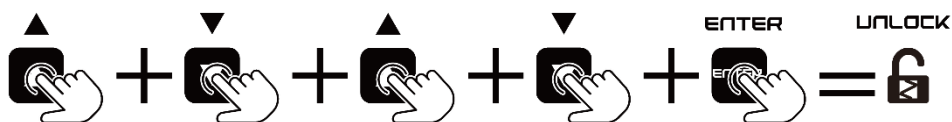

MENU		DESCRIPTION	
CHOOSE PATTERN	Static Color	R	000-255
		G	000-255
		B	000-255
		W	000-255
		A	000-255
		P	000-255
		Strobe	000-255
	Macro Color	1-16	
	Show Mode	AUTO	SP: 0-20
		FADE	SP: 0-20
		SNAP	SP: 0-20
		R-STRO	SP: 0-20
		G-STRO	SP: 0-20
		B-STRO	SP: 0-20
		A-STRO	SP: 0-20
		(Options)	
	User Colors	R	000-255
		G	000-255
		B	000-255
		W	000-255
		A	000-255
		P	000-255
		Bank	1-16
	User Run	Static Color	Color Mode: 001-016
		Auto Mode	Speed:001-020
USER SETTINGS	Channel	07-Ch	
		11-Ch	
	DMX Address	001-512	
	Slave Mode		
	WiFi Mode		
SYSTEM SETTINGS	White Balance	R	127-255
		G	127-255
		B	127-255
		W	127-255
		A	127-255
		P	127-255
	Show Battery	YES/NO	
	Display Sleep	Open	
		5Sec	
		10Sec	
		15Sec	
	Dimmer Option	Normal	
		Dimmer-1	
		Dimmer-2	
		Dimmer-3	
	Auto Power	On/Off	

	IRC Setting	YES/NO
	Wireless DMX Setting	YES/NO
	Wireless DMX FREQ	1CH-7CH
	Power Setting	High/Medium/Low
	Emergency Lamp	YES/NO
	DMX Hold	YES/NO
	Auto Lock	YES/NO
	Auto Lock	YES/NO
INFORMATION	Work Hours	001-999
	Software Version	Vxxxx
	Hardware Version	OLED90 6in1
	Power on	

DMX CHANNELS

7 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	RED	000-255	Red from darkness to brightness
2	GREEN	000-255	Green from darkness to brightness
3	BLUE	000-255	Blue from darkness to brightness
4	WHITE	000-255	White from darkness to brightness
5	AMBER	000-255	Amber from darkness to brightness
6	UV	000-255	UV from darkness to brightness
7	DIMMER	000-019	Normal
		020-039	Dimmer-1
		040-059	Dimmer-2
		060-255	Dimmer-3

11 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1	TOTAL DIMMER	000-255	Total dimmer
2	STROBE	000-009	Strobe close
		010-255	Strobe open, from slow to fast
3	RED	000-255	Red from darkness to brightness
4	GREEN	000-255	Green from darkness to brightness
5	BLUE	000-255	Blue from darkness to brightness
6	WHITE	000-255	White from darkness to brightness
7	AMBER	000-255	Amber from darkness to brightness
8	UV	000-255	UV from darkness to brightness
9	PROGRAMS	000-009	Dimmer mode
		010-029	Color selection: color selection for the 10th channel
		030-049	Jump, the channel 10 controls the speed
		050-069	Gradient, the channel 10 controls the speed
		070-089	Sudden, the channel 10 controls the speed
		090-109	Red on+ white strobe, the channel 10 controls the speed
		110-129	Green on+ white strobe, the channel 10 controls the speed
		130-149	Blue on+ white strobe, the channel 10 controls the speed
		150-169	Amber on+ white strobe, the channel 10 controls the speed
		170-255	UV on+ white strobe, the channel 10 controls the speed
10	COLOR SELECT OR SPEED	000-255	The function of this channel depends on the value of the 9th channel: When the 9th channel is 10-29, this channel is used to select the color When the 9th channel is 30-255, the control speed of this channel: 0 is the slowest, 255 is the fastest
11	DIMMER	000-019	Normal
		020-039	Dimmer-1
		040-059	Dimmer-2
		060-255	Dimmer-3



Handwriting practice area consisting of 20 horizontal dotted lines.



Handwriting practice lines consisting of 20 horizontal dotted lines.



Handwriting practice lines consisting of 20 horizontal dotted lines.



BEAMZ

YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.



BEAMZLIGHTING.COM