



SENNHEISER



SL Headmic 1

Model: SL Headmic 1
SL Headmic 1 -4
SL Headmic 1 -4 NC

Quick Guide
Kurzanleitung
Guide de démarrage rapide
Guia rápida
Instrucciones resumidas
Instruções resumidas
Beknopte gebruiksaanwijzing
Krótka instrukcja obsługi
Snabbguide
Kort vejledning
Pikaohje
Σύντομες οδηγίες
Kısa Kılavuz
Краткая инструкция
快速指南
快速使用指南
クイックガイド
요약 안내서


Sennheiser electronic GmbH & Co. KG
Am Labor 1, 30900 Wedemark, Germany
www.sennheiser.com
Printed in Germany, Publ. 03/21, 587492/A01

In the box


	Connector	 Quick Guide	 Safety Guide	 SL MZW 1	 MZC 1-2	 MZC 1-1	 2x Clip
 SL Headmic 1	3.5 mm	•		•	•		
 SL Headmic 1 -4	3-Pin	•		•	•		
 SL Headmic 1 -4 NC	3-Pin	•		•	•	•	•

Setup

3.5 mm jack plug

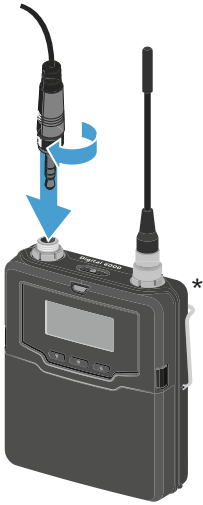

3-Pin connector

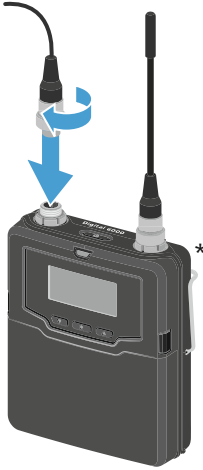

*not included

Frequency cap

MZC 1-2



+ 4 dB

MZC 1-1




+ 2 dB

or



Windshield


SL MZW 1

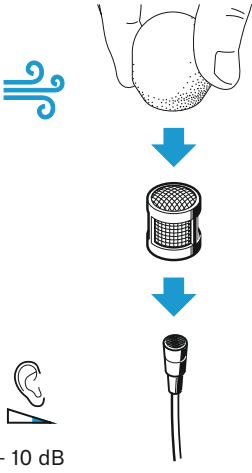


- 10 dB

Setup


1

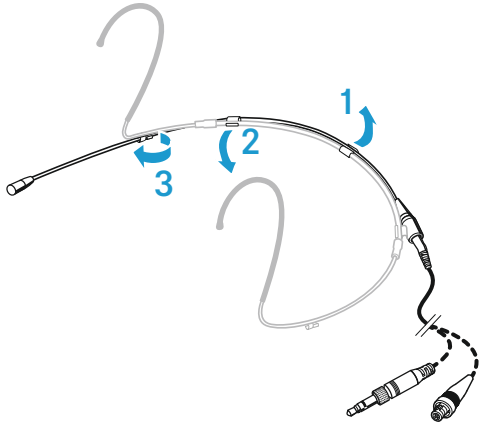

2


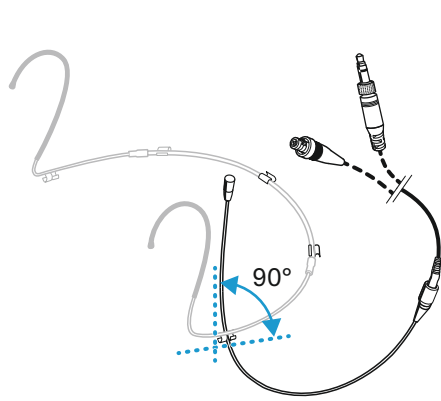


3

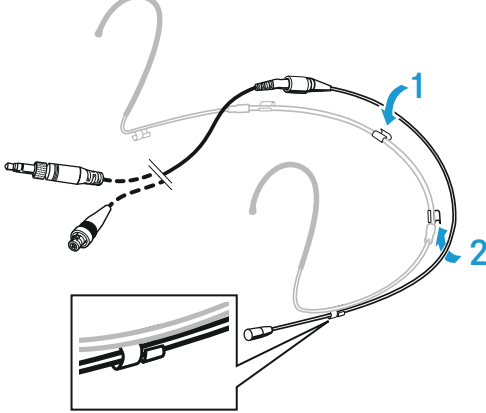


Accessory

MZQ 02*





*optional accessories


Use




or

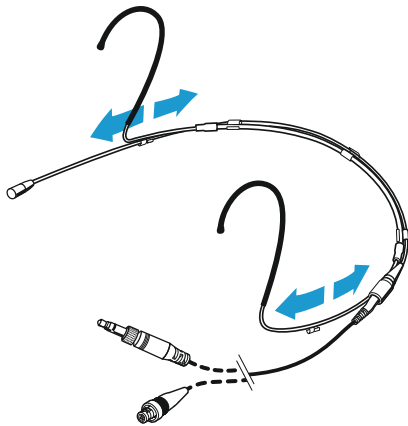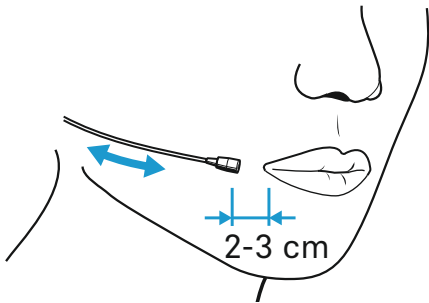


Cleaning

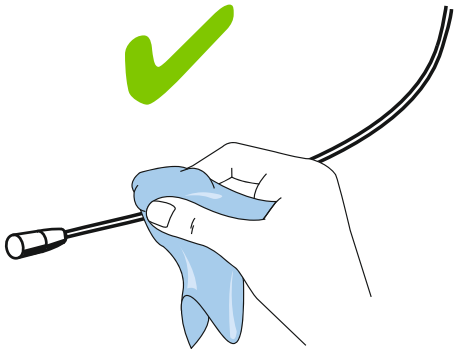


1




2



3




4



Specifications

Frequency response	20 – 20,000 Hz $\pm$ 3 dB
Pick-up pattern	omni-directional
Nominal impedance	1 k Ω
Min. terminating impedance	4.7 k Ω
Sensitivity	5 mV/Pa $\pm$ 3 dB
Diameter of mic capsule	3.3 mm
Max. sound pressure level	143 dB
Equivalent noise level	27 dB(A)
Supply current	approx. 240 μ A
Power supply	4.5 – 15 V
Operating temperature	-10 °C to +50 °C
Storage temperature	-20 °C to +70 °C
Relative humidity	max. 95 %
Cable length	1.6 m
Diameter of boom arm	1.1 mm
Weight (without cable)	7 g
Connector	3.5 mm jack plug or 3-Pin connector

Frequency response

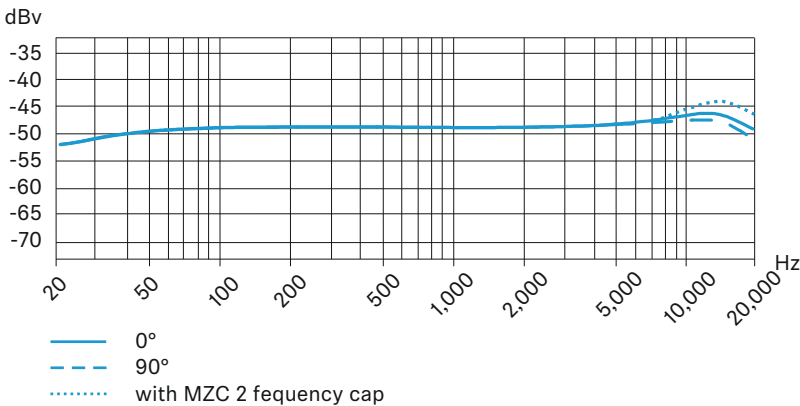

Polar pattern

