



OPERATING & ASSEMBLY INSTRUCTION


NAC3FX-W | powerCON TRUE1

A. OPERATING INSTRUCTION

Application:

The powerCON TRUE1 system is certified as connector with breaking capacity according IEC 60320, VDE 0625. It is intended for use as appliance couplers and interconnection couplers. It serves to supply power to an appliance and from an appliance to another equipment. To be installed by qualified person only.

Connector Assignment:

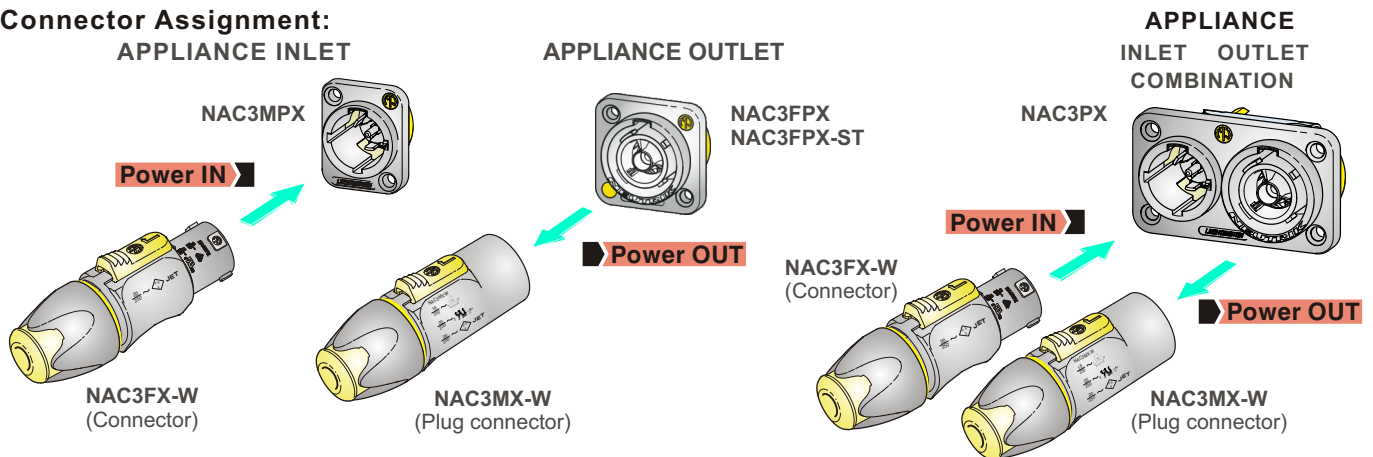


Approval based:	VDE EN 60320-1/EN60320-2-2	UL UL 498 / CSA C22.2 No. 182.3
Rating:	250 V ac / 16 A	250 V ac / 20 A
Cable Type:	H05VV-F3G 1.0 mm ² , Length max. 2 m H05VV-F3G 1.5 - 2.5 mm ² H07RN-F3G 1.5 mm ²	SJTOW, SJOOW 3 x 12 AWG
Strain Relief:	White chuck	White chuck
Cable O.D.:	6.0 - 12.0 mm	6.0 - 12.0 mm


B. ASSEMBLY INSTRUCTION

- A** Insert cable into the bushing and housing.


Note: "Apply cable pulling lubricant to cable jacket."

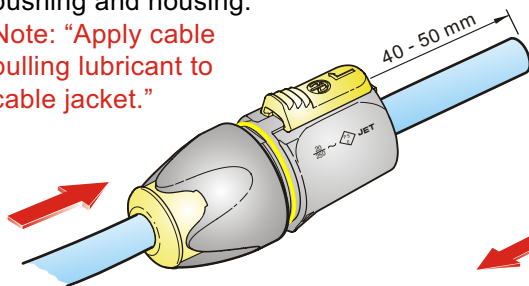


- B** Separate the housing from the bushing (cable remain in bushing)

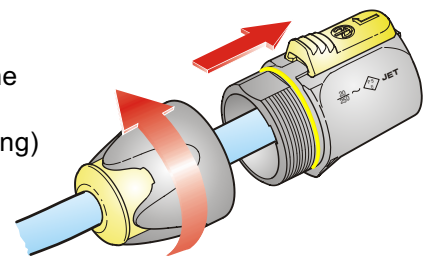


- C** Place chuck over the cable.

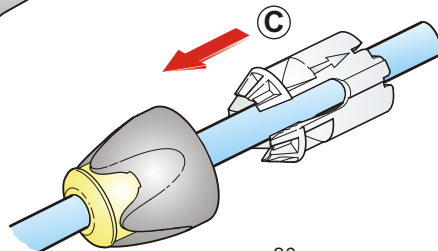

- D** Prepare cable as shown.

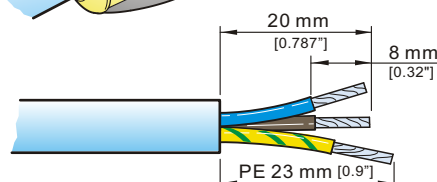


VDE (EN 60320-1/EN60320-2-2)

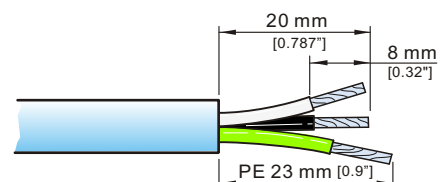

UL (UL 498 / CSA C22.2 No. 182.3)



E

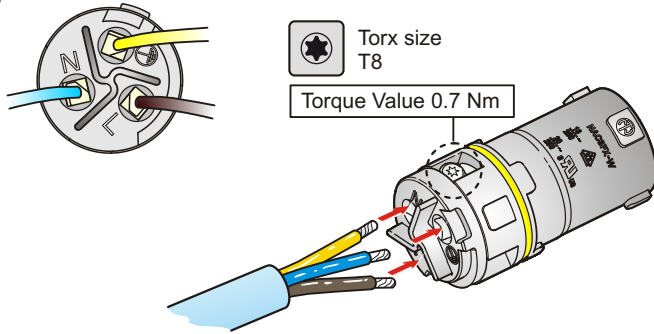


Slide the cable into the contacts and clamp with the screw with Torx size T8.

Wiring	VDE	UL
L ⇒	brown	black
N ⇒	blue	white
⊥ ⇒	green/yellow	green

F

Important:
Push and turn simultaneously.

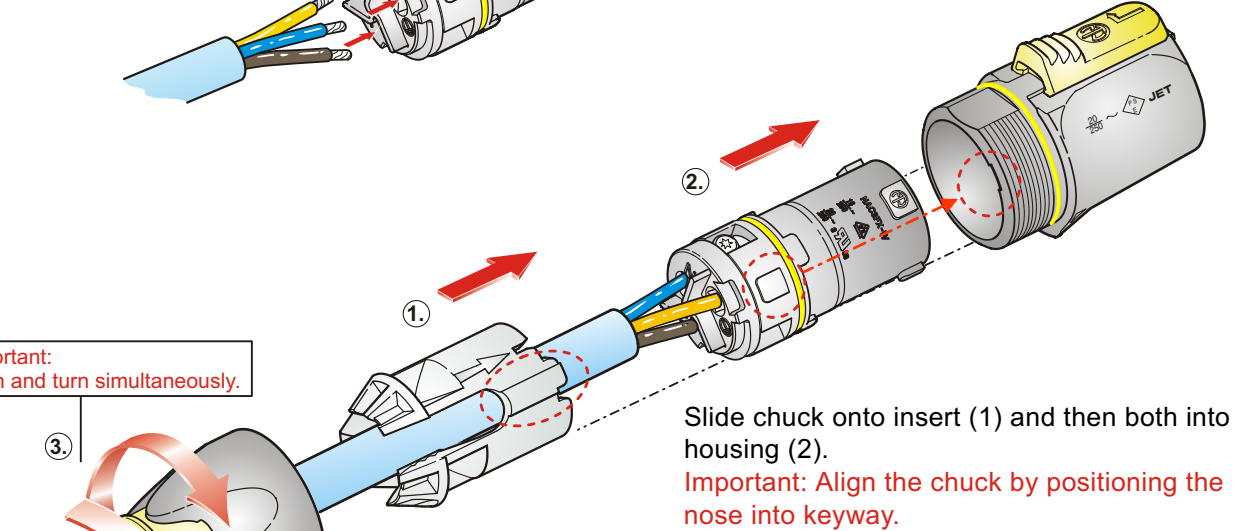


Slide chuck onto insert (1) and then both into housing (2).

Important: Align the chuck by positioning the nose into keyway.

G




Wrench size
13 mm

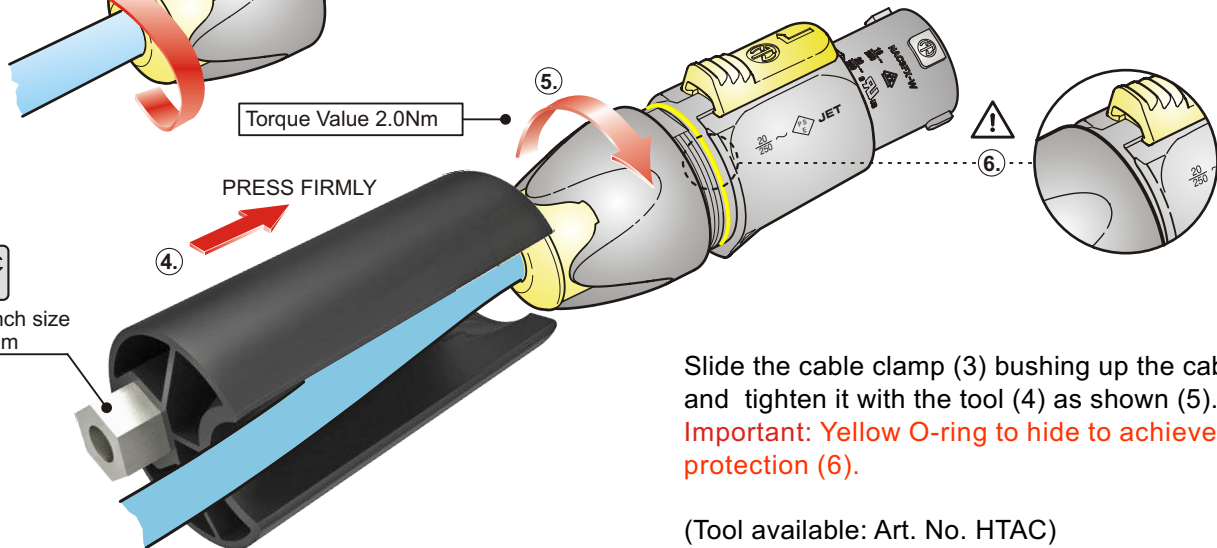

Slide the cable clamp (3) bushing up the cable and tighten it with the tool (4) as shown (5).

Important: Yellow O-ring to hide to achieve IP protection (6).


(Tool available: Art. No. HTAC)

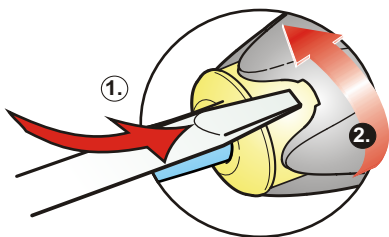

Disassembly (open twist lock):

1. Press with screw driver to unlock
2. Turn bushing while still pressing locking.

CAUTION



To ensure protection category, do not expose the connection to bending forces (e.g. do not attach loads to the cable, no free-dangling cable windings etc.).