

LD-1024DIN NET

B05032

DESCRIPTION

1024 Channel DMX interface & Multizone controller with Ethernet port for Local Area Network (LAN, WLAN) that can be easily mounted on a DIN Rail

FEATURES

- 1024 Channel DMX interface with ETHERNET port for Local Area Network (LAN, WLAN).
 - Can be used with the Wi-Light APP from a mobile device (Android + iOS) [Video 'Wi-Light 2 APP'](#)
 - 1024 output channels when used with a computer
 - Multizone 1024 output channels when used standalone without computer
- 30 minutes of Lighting, Audio and Video timeline synchronization with Pro DMX software
- Works with the Chromateq Led Player, Pro DMX, Pixxem, Studio DMX and Wi-Light 2 software (included).
- Functions and control in standalone mode:
 - Art-Net and sACN from SD card (including triggers)
 - Node to decode Art-Net and sACN to DMX (4 universes)
 - Automatic Real Time Clock triggering for different scenes (day, week, month, year)
 - External Triggering via 12 smart contacts
 - RS232 In/Out (16 characters for RS232 triggers, commands or orders)
 - UDP / Ethernet triggers and commands (from SDK)
 - Default start scene, scene priority, cross fade time
 - Total control via the Wi-Light 2 app (Android + iOS)
 - **Multiple Zone control: 10 different programs can run simultaneously**
 - Master/Slave mode for up to 64 interfaces connected together
 - An optional external infra-red receiver can be connected to the unit (LD-512Kit-IR = IR receiver + 2 remote controllers)
 - Micro SD card slot for memory extension
- Power supply: 5-24V, 0.2A input or 5V DC via USB-C

For more information about the software: www.chromateq.com



www.briteq-lighting.com | <https://www.facebook.com/Briteq>


Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2022 by BEGLEC NV. All rights reserved.



TECHNICAL SPECIFICATIONS

General : Dimensions (cm)	11 x 10 x 6
General : Weight (kg)	0.5
General : Energy Label	No
General : Color	No
General : Display	No
General : IP rating	indoor
Control : Protocol	Art-Net, sACN, DMX
Control : programmable	Yes
Control : upgradable software	Yes
Control : maximum DMX channels	1024
Connections : input	screw terminal block (dmx), usb, RJ45
Connections : output	screw terminal block (dmx)
Brand	BRITEQ
EANCode	5420025650328

COMPATIBLE SOFTWARE

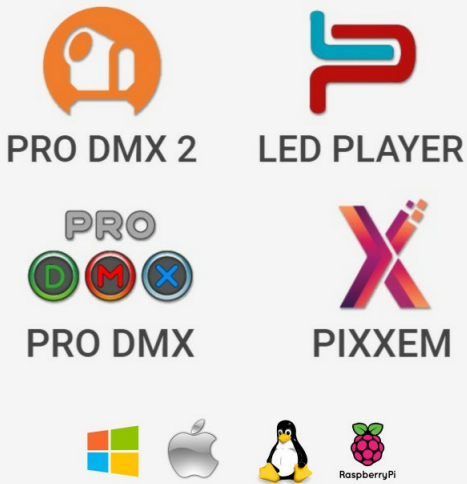

YOUR DEALER



www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2022 by BEGLEC NV. All rights reserved.