

BT-THEATRE 50WW (BLACK)

06013

DESCRIPTION

Stylish LED theater spot with manual 10° ~ 50° zoom. 50watt LED, warm white 3200K with high (CRI >92) for natural colors.

FEATURES

- Stylish LED theater spot with manual 10° ~ 50° zoom.
- 50watt LED, warm white 3200K with high CRI-factor (>92) for natural colors.
- Thanks to its attractive looks this projector is perfect for use in showrooms, shops, exhibition booths, rental, restaurants, museums, ...
- Color frame for use of color filters and four-leaf barndoor included
- No more heavy and expensive dimmer packs needed!
- Completely silent operation, no noisy cooling fan
- Extruded anodized aluminium housing with strong bracket, available in black and white color.
- LCD-display to select different working modes:
 - Standalone (master) Mode : set dimmer + strobe (if needed)
 - Master/slave mode: connect several projectors together, the first projector controls the others.
 - DMX-controlled: 4 different channel modes (8bit and 16bit dimming) for maximum flexibility.
- Selectable lamp behavior: halogen lamp (slow) or led (fast)
- Four dimmer curves: linear, square, inverse square, S-curve
- In case of DMX failure you can choose between blackout and freeze mode.
- RDM-functionality for easy remote setup: DMX addressing, channel mode, ...
- Lock function to avoid unwanted altering of the settings.
- Default factory settings + user settings can be saved/loaded.
- 3pin DMX in/outputs and fixed 1m power cord with standard mains plug (CEE 7/7)






www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.

SPECIFICATIONS

General : Application	Architectural, Stage & Rental, Theatre
General : Dimensions (cm)	24,1 x 25,1 x 19,5 cm
General : Weight (kg)	3.63
General : Powerinput	AC 100 - 240V, 50/60Hz
General : Energy Label	No
General : Power consumption W	50
General : Color	black
General : Display	LCD
General : Fixation	optional standard clamp
General : IP rating	indoor
Control : manual	Yes
Control : Master/Slave	Yes
Control : DMX M/S	No
Control : Standalone	fixed
Control : Type included remote	-
Control : optional remote	-
Control : programmable	No
Control : upgradable software	Yes
Control : maximum DMX channels	3
Light : lamp socket	none
Light : Lux	-
Light : lumen	-
Light : lamp	COB
Light : min. color temperature (K)	3200
Light : max. color temperature (K)	3200
Light : CRI	92
Light : colors	Warm white
Light : mix colors	No
Light : fixed gobos	-
Light : rotating gobos	-
Light : focus	None
Light : zoom	Manual
Light : iris	No
Light : prism (# facets + rotating y/n)	-
Light : frost filter	No
Light : min. beam angle (°)	10
Light : max. beam angle (°)	50
Connections : input	3 pin XLR, rdm
Connections : output	3 pin XLR
Connections : XLR 3 pin	Yes
Connections : XLR 5 pin	No
Connections : Power Conn.	No
Connections : midi	No
Connections : usb	No
Connections : wifi	no
Connections : bluetooth	No
Connections : artnet	No
Connections : rdm	Yes
Brand	BRITEQ
EANCode	5420025660136
Discontinued	No

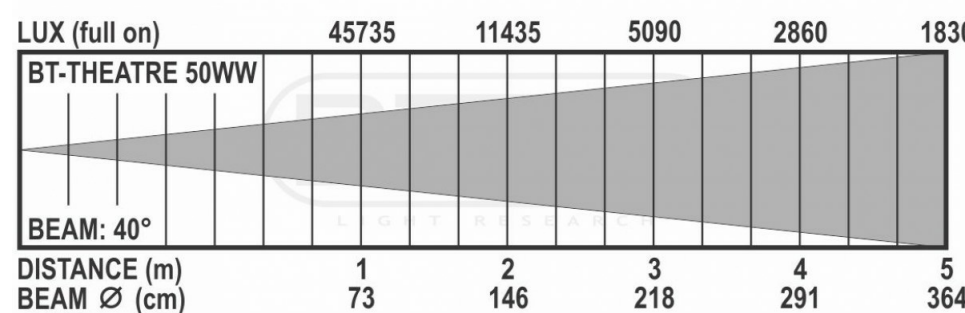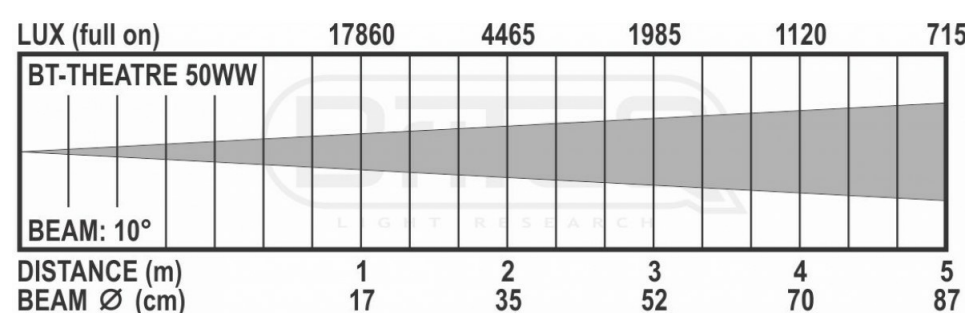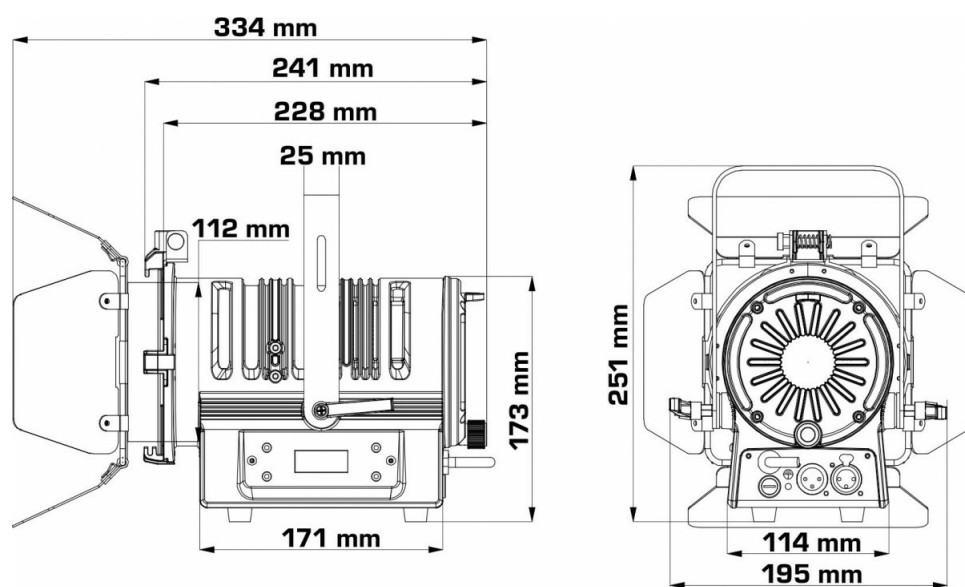

YOUR DEALER



www.briteq-lighting.com | <https://www.facebook.com/Briteq>

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved.
This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.