BT-GIGAFLASH

DESCRIPTION

Extremely powerful LED strobe with 9 separately controllable segments and exceptional light output of +/-100.000 lm.

FEATURES

- Extremely powerful LED strobe with 9 separately controllable segments!
- 1260 strobe LEDs for an exceptional light output of +/-100.000 lm
- Long time blinder function with auto fade down function
- Stunning built-in **random pixel strobe effects**, no extra programming needed.
- Full DMX-control with:
- 7 different channel modes for strobe effects (1ch to 13ch)
- 3 different pixel control modes (1ch to 9ch)
 - LCD-display for easy setup menu navigation
 - The 2-leaf barndoor with glossy internal reflector increases the visual output and protects during transport.
 - Can be used as wash projector at reduced output *(ex. light up the stage during technical buildup of a gig)*
 - TV-Studio ready:
 - Natural white: 4500K with CRI > 90
 - Flicker free 2000Hz LED refresh rate
 - Low noise cooling system
 - Compact and sturdy ALU-housing with tempered glass in front of the leds, perfect for rental companies!
 - Strong hanging bracket, prepared for use with omega clamps for fast installation.
 - In case of DMX failure you can choose between blackout and freeze mode.
 - Lock function to avoid unwanted altering of the settings.
 - Default factory settings can be loaded.
 - 3pin & 5pin XLR along with power in/outputs for easy daisy chaining of several units up to 16A.
 - Power supply with active PFC.






www.briteq-lighting.com | https://www.facebook.com/Briteq

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.

SPECIFICATIONS

DJ & Club, Stage & Rental, **General : Application** Theatre General : Dimensions (cm) General : Weight (kg) **General : Powerinput General : Energy Label** General : Power consumption W **General : Color General : Display General : Fixation General : IP rating Control : manual Control : Master/Slave** Control : DMX M/S **Control : Standalone Control : Type included remote Control : optional remote Control : programmable Control : upgradable software Control : maximum DMX channels** Light : lamp socket Light : Lux Light : lumen Light : lamp Light : min. color temperature (K) Light : max. color temperature (K) Light : CRI Light : colors Light : mix colors Light : fixed gobos Light : rotating gobos Light : focus Light : zoom Light : iris Light : prism (# facets + rotating y/n) **Light : frost filter** Light : min. beam angle (°) Light : max. beam angle (°) **Connections : input Connections : output Connections : XLR 3 pin Connections : XLR 5 pin Connections : Power Conn. Connections : midi Connections : usb Connections : wifi Connections : bluetooth Connections : artnet Connections : rdm** Brand EANCode Discontinued No

47,1 x 19,5 x 27,4 (237) cm 8.54 AC 230V, 50Hz N/A 900 black LCD optional omega bracket indoor No Yes No no -No Yes 13 none -LED 4500 4500 90 White No None None No No 120 3 pin XLR, 5 pin XLR, powercon 3 pin XLR, 5 pin XLR, powercon Yes Yes Yes No No no No No No BRITEQ 5420025647144

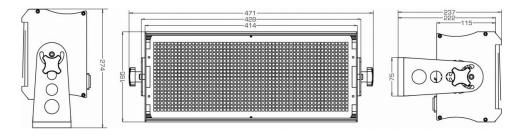

颐			W	
		ţ.		
ET.				

YOUR DEALER



www.briteq-lighting.com | https://www.facebook.com/Briteq

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2015 by BEGLEC NV. All rights reserved.