BT-COLORAY 120R

DESCRIPTION

Stylish outdoor 120W RGBW single beam projector for stage, TV-show, exhibition boots and architectural lighting

FEATURES

- This stylish 120W RGBW single beam projector is equipped with a 15° lens making it a very powerful tool for all kinds of events (stage, TV-show, exhibition boots, architectural lighting,...)
- IP65 rating
- Three different DMX-modes: 4, 6 and 7 channels.
- RDM-functionality for easy remote setup: DMX addressing, channel mode, ...
- The LCD-display assures easy navigation in the different setup menus.
- TV-Studio ready: flicker free 1200Hz LED refresh rate.
- Selectable lamp behavior: halogen lamp (slow) or led (fast)
- Four dimmer curves: linear, square, inverse square, S-curve
- In case of DMX failure you can choose between blackout and freeze mode.
- Lock function to avoid unwanted altering of the settings.
- White balance adjustment to perfectly match the colors of several projectors.
- Default factory settings + user settings can be saved/loaded.
- 5pin DMX in/outputs and Neutrik $^{\mbox{\tiny I\!R}}$ TRUE1 PowerCON $^{\mbox{\tiny I\!R}}$ in/outputs for easy daisy chaining.
- Fan cooling for longer LED life.






www.briteq-lighting.com | https://www.facebook.com/Briteq


Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2018 by BEGLEC NV. All rights reserved.


SPECIFICATIONS

General : Application General : Dimensions (cm) General : Weight (kg) **General : Powerinput General : Energy Label General : Power consumption W General : Color General** : Display **General : Fixation General : IP rating Control : manual Control : Master/Slave Control : SMA RT-DMX Control : Standalone Control : programmable Control : upgradable software Control : maximum DMX channels** Light : lamp socket Light : lamp Light : colors Light : mix colors Light : focus Light : zoom Light : iris Light : min. beam angle (°) Light : max. beam angle (°) Light : min. refresh rate (kHz) Light : max. refresh rate (kHz) **Connections : input Connections : output** Brand **EA NCode** Discontinued

Architectural, Stage & Rental, Theatre 24 x 27 x 30 5.53 AC 100 - 240V, 50/60Hz No 129 black touchscreen optional omega bracket outdoor Yes Yes No automatic, fixed No Yes 7 No LED RGBW Yes No No No 15 15 No No 5 pin XLR, TRUE1 powerCON 5 pin XLR, TRUE1 powerCON BRITEQ 5420025655095 No

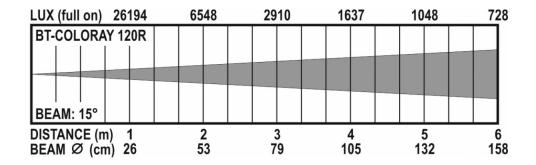









www.briteq-lighting.com | https://www.facebook.com/Briteq

Beglec NV has the right to change products and specifications with and without notice. Major as well as minor changes can be involved. This leaflet can contain errors, therefore we advice to consult your local dealer to ensure that actual features and specifications match your requirements. Copyright © 2018 by BEGLEC NV. All rights reserved.