BT-COLORAY MULTI

DESCRIPTION

Powerful 120W RGBW projector with a waterproof IP65 die-cast ALU-housing.

FEATURES

- Powerful 120W RGBW projector with a waterproof IP65 die-cast ALUhousing.
- Wide standard beam angle, but different accessories are included to modify the beam:
 - **2 compound eye lenses** with different beam angles: 15° and 35°
 - 1 Glare shield (anti-glare and a better beam)
- An optional Barndoor is also available (BT-BARN 4 RAY-series, code: B05527)
- Three different DMX-modes: 4, 6 and 7 channels.
- RDM-functionality for easy remote setup: DMX addressing, channel mode. ...
- OLED display with backlit touch buttons for easy configuration, even in the dark.
- TV-Studio ready: flicker free 1200Hz LED refresh rate.
- Selectable lamp behavior: halogen lamp (slow) or led (fast)
- Four dimmer curves: linear, square, inverse square, S-curve
- In case of DMX failure you can choose between blackout and freeze mode.
- Lock function to avoid unwanted altering of the settings.
- White balance adjustment to perfectly match the colors of several projectors.
- Default factory settings + user settings can be saved/loaded.
- 3pin DMX in/outputs and Neutrik® TRUE1 PowerCON® in/outputs for easy daisy chaining.
- Fan cooling for longer LED life.







BARNDOOR OPTIONAL



www.briteq-lighting.com | https://www.facebook.com/Briteq

TECHNICAL SPECIFICATIONS

General: Application DJ & Club, Stage & Rental

General: Weight (kg)

General: Powerinput AC 100 - 240V, 50/60Hz

General: Energy Label Νo **General: Power consumption W** 129 **General: Color** black **General: Display OLED**

General: Fixation optional omega bracket

General: IP rating outdoor **Control: manual** Yes Control: Master/Slave Yes **Control: SMART-DMX** No

Control: Standalone automatic, fixed

Control: programmable No **Control: upgradable software** Yes **Control: maximum DMX** 7 channels **Light: lamp socket** No

1418 (5m) **Light: Lux** Light: lamp COB

Light: colors Red, Green, Blue, White, RGBW

Light: mix colors Yes


manual frost **Light: functions**

Light: min. beam angle (°) 13 **Light**: max. beam angle (°) 35 Light: min. refresh rate (kHz) No **Light**: max. refresh rate (kHz) No

3 pin XLR, TRUE1 powerCON **Connections: input** 3 pin XLR, TRUE1 powerCON **Connections: output**

Brand BRITEQ 5420025655248 **EA NCode**

Discontinued Νo

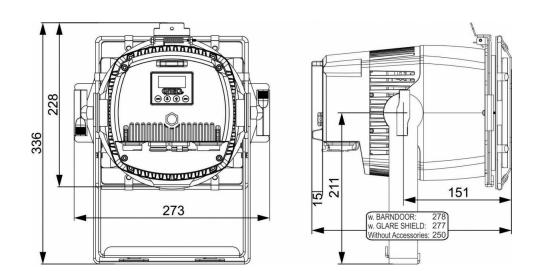

LUX (full on) 35108		8777			3900			2194			1418			975	
BT-COLORAY MULTI										1					
DEAM: 420	J		9 1		R	5 F	A R	C H							
BEAM: 13° DISTANCE (m) 1		2			3			4					6]		
DISTANCE (m) 1 BEAM Ø (cm) 23			45		5	6		91			114		137		

