



CM-800

Chime Microphone

Features

- Condenser microphone
- 4 chime tones
- Individual chime and MIC volume control
- Balanced and unbalanced outputs


CM-800 is a desktop microphone for announcements equipped with a chime tone generator. CM-800 uses a gooseneck and a condenser capsule. A red ring lights up when the microphone is on. When the talk button is pushed a musical chime tone is played before talking. When it is switched off a chime tone is also played informing about the end of the announcement. The speech and the chime volume can be set individually with button on the rear panel. CM-800 is equipped with one unbalanced input and one balanced XLR and one unbalanced 6.3 mm jack outputs. Made of die cast aluminium mainly, CM-800 is robust and be installed in areas with intensive use like transport stations, schools, canteens, supermarkets, etc.



Specifications

Power Supply	240V/50Hz, DC 15V 400mA; 230V/60Hz, DC 15V 500mA; 115V/50Hz, DC 15V 400mA
Power Consumption	60W (AC) - 45W (DC 12V)
4 Chime Tones	400, 554, 659, 880Hz
Microphone	Condenser Microphone
Unbalanced Output	100mV 10mV
Balanced Output	230mV 10mV
Color	White
Controls	Volume x 2
Dimension (W x D x H)	132 x 155 x 380 mm (5.2" x .6.1" x 15")
Weight	0.8 kg (1.82 lbs)

Specifications subject to modification without notice

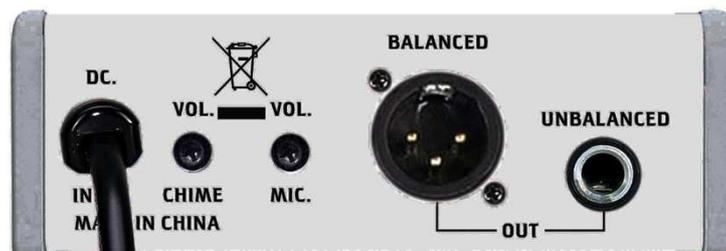

SEIKAKU TECHNICAL GROUP LIMITED

NO.1 LANE 17, SEC.2, HAN SHI WEST ROAD, TAICHUNG 40151 TAIWAN

Tel: +886-4-22313737 Fax: +886-4-22346757 www.seikaku.hk

2018 V.1