# PIXEL PIPE

## 06204

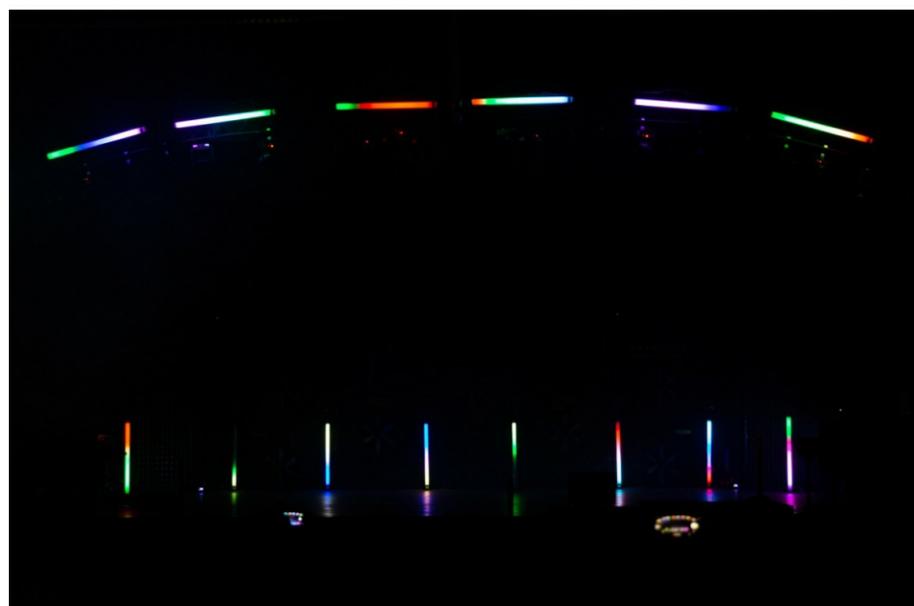## Description

JB SYSTEMS Decorative LED TUBE with 8 RGB color zones (pixels)

## Features

- Perfect for use in: retail stores, commercial displays, architectural lighting, indoor decoration, clubs, pubs, mobile DJs, trussing, ...
- Equipped with 32 x RGB SMD5050 LEDs divided in 8 sections.
- IR-remote controller included.
- Different working modes:
  - **Standalone with IR-remote:** automatic / beat synchronized color patterns.
  - **Master/slave mode:** several tubes can be used together for wonderful preprogrammed, music synchronized lightshows.
  - **DMX-controlled:** 3 different channel modes (3,7 and 24ch) with program selection and individual RGB control.
- Low power consumption : only 12W
- For indoor use only.
- 0-100% dimming and strobe function.
- 4digit LED-display for easy menu navigation
- Tripod stand





www.jb-systems.eu | https://www.facebook.com/JBS.Belgium/

**JB**SYSTEMS

## Technical Specifications

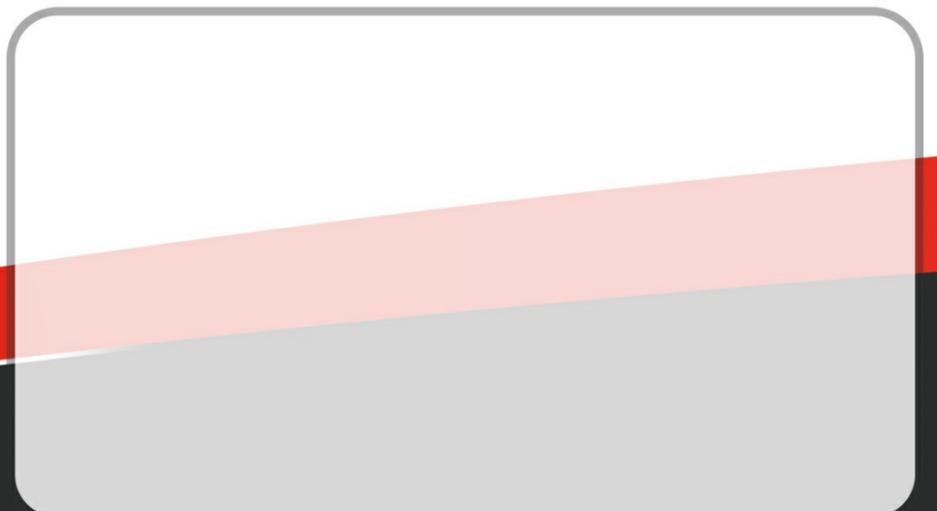| | |
|---|---|
| **General : Application** | Architectural, Commercial, DJ & Club, Stage & Rental |
| **General : Dimensions (cm)** | 105 x 20 x 22 (tube diameter 5 cm) |
| **General : Weight (kg)** | 1.24 |
| **General : Powerinput** | AC 100 - 240V, 50/60Hz |
| **General : Energy Label** | No |
| **General : Power consumption W** | 12 |
| **General : Color** | white |
| **General : Display** | LED |
| **General : IP rating** | indoor |
| **Control : manual** | Yes |
| **Control : Master/Slave** | Yes |
| **Control : SMART-DMX** | No |
| **Control : Standalone** | automatic, sound, fixed |
| **Control : Type included remote** | IR remote controller |
| **Control : programmable** | No |
| **Control : upgradable software** | No |
| **Control : maximum DMX channels** | 24 |
| **Light : lamp socket** | none |
| **Light : lamp** | LED |
| **Light : colors** | RGB |
| **Light : mix colors** | Yes |
| **Light : focus** | No |
| **Light : zoom** | No |
| **Light : iris** | No |
| **Light : frost filter** | No |
| **Light : min. refresh rate (kHz)** | No |
| **Light : max. refresh rate (kHz)** | No |
| **Connections : input** | 3 pin XLR, IEC |
| **Connections : output** | 3 pin XLR, IEC |
| **Brand** | JB SYSTEMS |
| **EANCode** | 5420025662048 |
| **Discontinued** | No |

## Your dealer

**JBSYSTEMS**